

Specialty Water Treatment Systems



Water Techniques Exclusive ProSelect under sink chillers are designed to provide up to 1 gallon of chilled water per hour from the convenience of a separate faucet. The ProSelect's air cooled, compact design easily fits under most kitchen cabinets without taking up precious space. The internal components are made of 304 stainless steel for years of reliable operations. Each system is certified by the National Sanitation Foundation (NSF) and complies with the following: ANSI 61, The National Safe Water Drinking Act, The 1988 Lead Contamination Control Act and is listed by Underwriters Laboratory to US and Canadian safety standards.

The Key to Efficiency and Reliability:

- ▶ Powder Coated Galvanized Steel Cabinet with Plastic Front
- ▶ Air-Cooled Designed to Fit Under Sink
- ▶ Compact, Economical and Easy to Installed
- ▶ 4 Ft. Insulated Power Cord with NEMA 5-15 Plug
- ▶ Stainless Steel Storage Tank
- ▶ Stainless Steel Water Tube Connections
- ▶ Welded Water Lines to Eliminate Corrosion and Assure Leak Proof Operation
- ▶ R-134a Refrigerant


Specifications:

Model	Capacities*		Hot Tank Available	Pre-Cooler	115 volts, 60Hz		Glass Filler Accessory Option	Cabinet Color Options
	Cooling Capacity GPH (LPH)	Base Rate GPH (LPH)			Full Load Amps	Rated Watts		
R1P	1	--	No	No	1.3	135	No	No



Certified to NSF/ANSI 61/Section 9


*Capacities are at industry standard rating conditions of 50° F (10° C) outlet water, 80° F (26.7° C) inlet water and 90° F (32.2° C) ambient air.

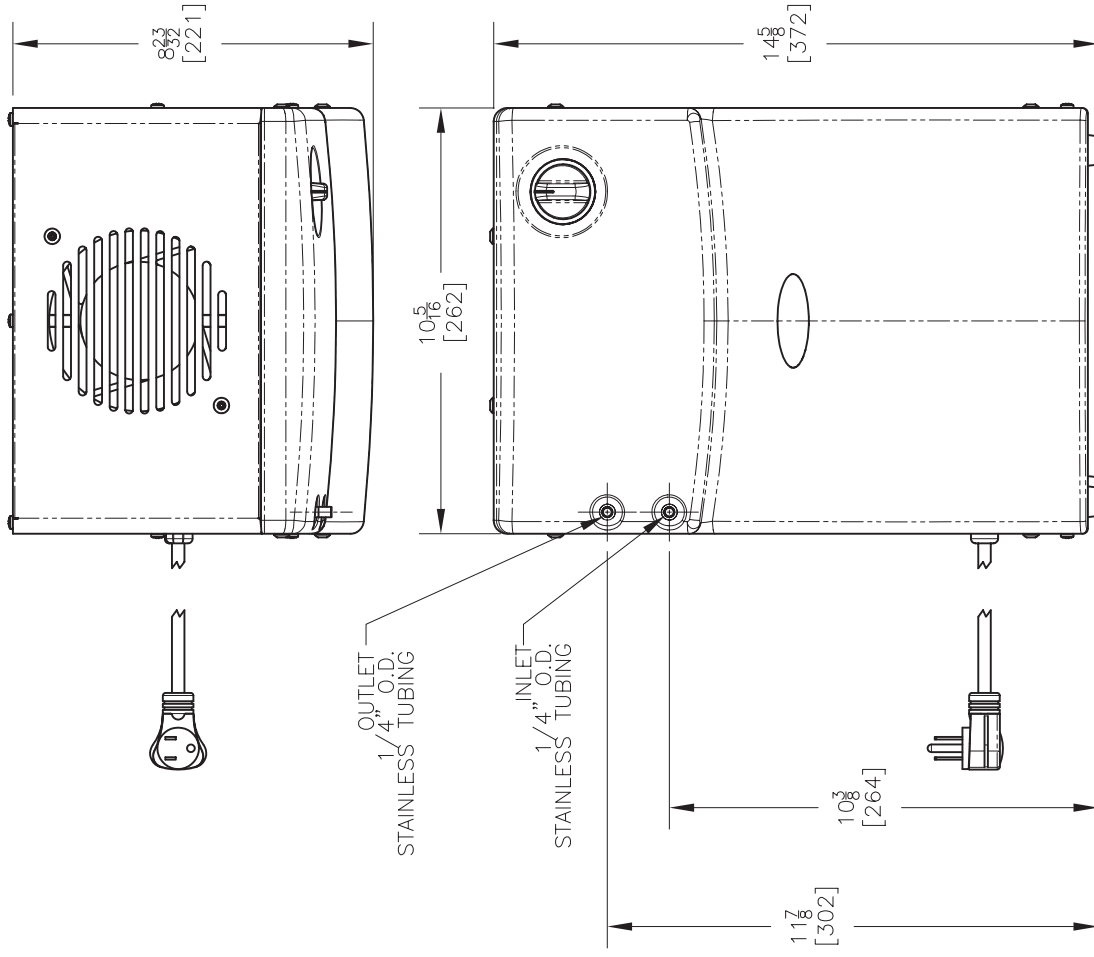

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
2. FOR BEST PERFORMANCE, ALLOW A 2" [51] SPACE AROUND THE SIDE AND THE TOP. DO NOT PUT ANY OBJECTS ON TOP OF THE CHILLER THAT COULD OBSTRUCT THE FAN.

THIRD ANGLE PROJECTION



ROUGHING-IN AND DIMENSIONAL DRAWING